

Ø10mm RF Cable (LMR400)

For External Antenna Connection

Specifications

Electrical Specifications

Length	2 m	3 m	5 m
VSWR (Max.)	1.20	1.20	1.30
Loss (Cable Only)	2 m	3 m	5 m
Loss @900 MHz, dB	0.256	0.384	0.640
Loss @2 GHz, dB	0.392	0.588	0.980
Loss @2.5 GHz, dB	0.444	0.666	1.110
Loss @5.8 GHz, dB	0.710	1.065	1.775
Loss (with 2 Connectors)	2 m	3 m	5 m
Loss @900 MHz, dB	0.556	0.684	0.940
Loss @2 GHz, dB	0.692	0.888	1.280
Loss @2.5 GHz, dB	0.744	0.966	1.410
Loss @5.8 GHz, dB	1.010	1.365	2.075
Impedance	50 Ω (Nominal)		
Frequency Range	DC to 6 GHz (Max.)		
Dielectric Withstanding Voltage	2,000 V (rms)		
Insulation Resistance	5,000 MΩ (Min.)		

Mechanical Specifications

Durability	500 Cycles (Min.)
Temperature	-45°C to +85 °C (Cable)
Bending Radius	25.4 mm (Min.)

Cable Material Specifications

Conductor	Copper Clad Aluminium, 1 Core, Ø2.74 mm
Insulation	PEF, Thickness 2.2 mm, Outer Ø7.24 mm
Binder	Sealed Aluminium Mylar Tape
Braid Shield	Aluminium Alloy Wire, 85%↑ Coverage
Jacket	PVC or PE, Outer Ø10.3±0.25 mm

Connector Material Specifications

Body	Brass, Ni or Tri-alloy Surface Plating
Center Conductor	Brass, Au or Ag Surface Plating
Insulator	PTFE
Other	Brass, Ni Surface Plating


Certification

IEC	IEC 60169-16
-----	--------------



Photo is for reference only

Drawing Diagram

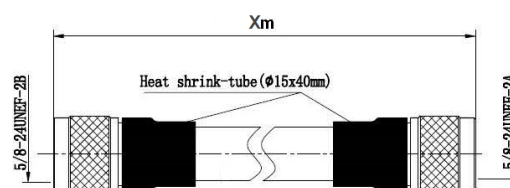

Product Ordering

Part Number: GE.CA-N002-04

2m Ø10mm RF Cable with 2 N-male Connectors
- using Times LMR400 cable & Amphenol connector

Part Number: GE.CA-N003-04

3m Ø10mm RF Cable with 2 N-male Connectors
- using Times LMR400 cable & Amphenol connector

Part Number: GE.CA-N005-04

5m Ø10mm RF Cable with 2 N-male Connectors
- using Times LMR400 cable & Amphenol connector

Anywhere Networks reserves the rights to change, modify, transfer or otherwise revise the publication and the product specification without notice. All scaling metrics outlined in this document are maximum supported values. The scale may vary depending on the deployment scenario and features enabled. Visit anywherenetworks.com or contact sales@anywherenetworks.com for more details.